



Sattler elements & LUMERA

FEATURES

The perfect interplay of top-quality design and technical functionality.



True beauty comes from within

Sattler quality awning fabrics are the result of years of continuous research and development.

Technical innovations and constant manufacturing improvements are driven by your feedback and the drive to meet market demands.

The Sattler HighTEX quality seal is our commitment to outstanding quality with a guarantee that your awning fabric will pass the test of time.



Long lasting pleasure guaranteed

Outanding water, dirt and fungal repellency.
Easy clean performance that helps your awning perform for years to come.



UV treated certainty

Tested to the worlds strictest UV standard 801, skin protection is the aim. This product when used as part of a sun protection solution offers protection, from damaging UV.

It should be used as part of an overall regime that includes sun protection factor sunscreen.





Talking Color Kit ## Sattlers extensive colour

Sattlers extensive colour palette is the ideal choice to create your solution. Let colour reflect your individual style and mood.



Saving energy naturally

With energy savings of 80% possible, Sattler awning fabrics are the smart solution. The natural way to save energy.



Quality in every fibre

10 + 5 year extended warranty on functionality, durability and colour fastness on all fabrics. For peace of mind performance. Ask your consultant for further information.









are made from 100% solution dyed acrylic (SDA). Brilliant and durable colours with optimum colour fastness for all outdoor applications.



Imagine in - See it

The Sattler design selector offers you a fast, simple selection process for that perfect awning selection.

Fabrics as role model

Certified to ISO standard

and Okeo-Tex non harmful


solutions responsible

conscience.

9001:2008 14001:2004

manufacturing with a clean



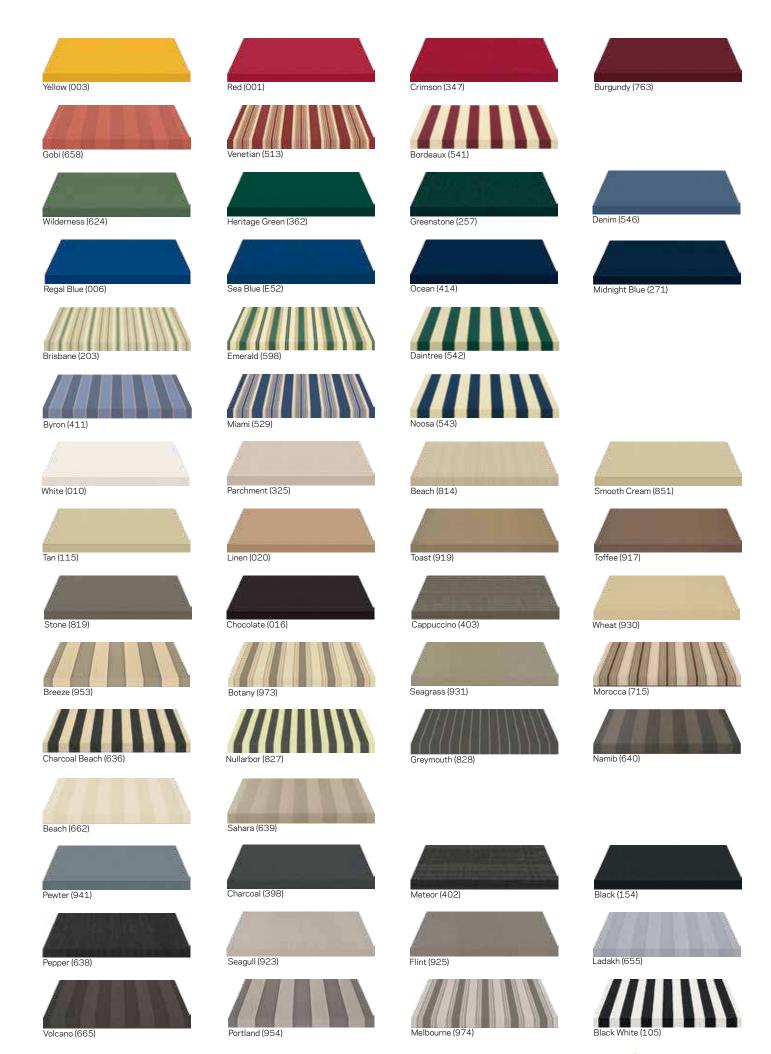

TECHNICAL DATA















Technical data shown below are average values of the current production		Sattler STRIPES	Sattler SOLIDS	Sattler LUMERA
Base	DIN 60 001	PAC	PAC	PAC
Total weight (g/m ²)	DIN EN ISO 12127	290	290	290
Tensile strength (daN/5 cm)	DIN EN ISO 13934-1	145/100	145/100	160/120
Max. tensile strength elongation (%)	DIN EN ISO 13934-1	30/22	30/22	29/20
Tear resistance (daN)	DIN EN ISO 13937-2	3.5/3.0	3.5 / 3.0	4.1 / 4.1
Water column	EN 20 811	315mm	315 mm	460 mm
Water repellency (spray test)	EN 24 920	Note: 100	Note: 100	Note: 100
Oil repellency	AATC 118	Note: 5	Note: 5	Note: 5
Colour fastness	DIN EN ISO 105-B02	min. 7	min. 7	min. 7
Width		120 cm	120 cm	120 cm

Note: Subject to change in view of technical upgrades. Values indicated without tolerance levels are nominal values with a tolerance range of ±5%. All data presented here is given to the best of our current knowledge for guidance purposes and is not legally binding.

CARE INSTRUCTIONS:

Clean with water or a mild soapy solution. Use a soft brush to avoid harsh scrubbing. Rinse with clean water.

Under no circumstances should the cover be cleaned with high-pressure cleaners, chemical substances or in a washing machine. The cover should never be rolled or folded up and put away when wet.

www.sattler-suntex.com



Scan to download PDF.



